


### Control and Configure Beyond Plug-and-Play

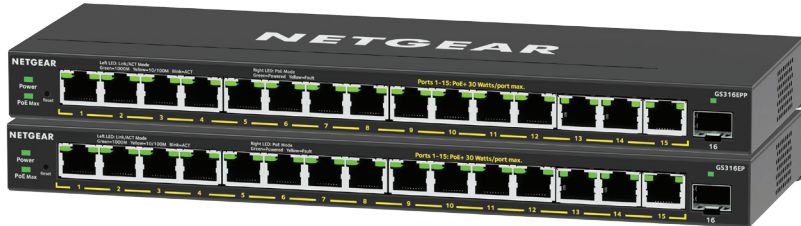


NETGEAR Plus Switches with PoE meets business networks growing need by providing fundamental network features such as simplified VLANs, QoS set-up and IGMP Snooping that will help optimize the performance of business networks. Plus Switches are the perfect upgrade from the plug-and-play unmanaged switch, delivering essential networking features at a very affordable price. These models support Power-Over-Ethernet (PoE) and can power devices such as VOIP phones, surveillance IP cameras, wireless access points and many other applications. These new PoE+ Gigabit Ethernet Plus switches models include uninterruptible PoE to help optimize the performance and troubleshooting of business networks. The new and improved business-friendly GUI allows easy management and simple configuration. With the growing deployment of applications and an all-in-one solution, providing management and power to these applications would be ideal.

### Highlights

- Enable network configuration and management at the price point of unmanaged switches
- Simple, yet useful network set-up on top of plug-and-play connectivity
- Business-friendly and easy-to-use web browser-based management GUI
- VLAN support for traffic segmentation
- Quality of Service (QoS) for traffic prioritization
- Auto “denial-of-service” (DoS) prevention
- Troubleshoot connection issues via cable test
- Loop prevention<sup>1</sup>, loop detection<sup>2</sup>, and broadcast storm controls
- Rate limiting for better bandwidth allocation
- Port mirroring for network monitoring
- Jumbo frame support
- Advanced features such as per port PoE controls
- Uninterrupted PoE keeps PoE power on even when the switch is updating firmware or performing software reboot.
- 802.3at standard offering 30W/port
- Fanless and versatile mounting option (desktop and wall-mountable)

### Small Office/Home Office Network Diagram

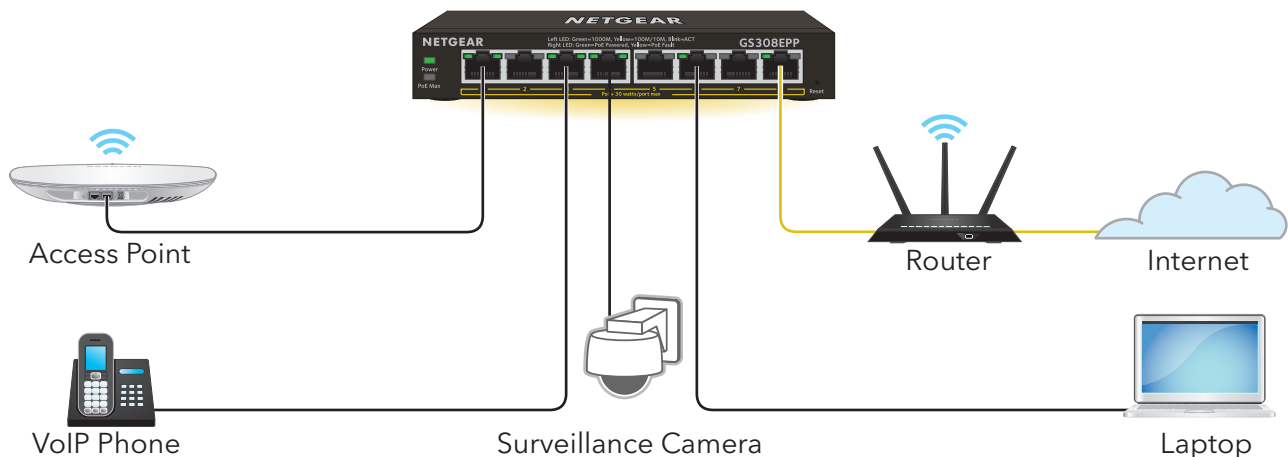

<sup>1</sup> Applies to GS316EP, GS316EPP

<sup>2</sup> Applies to GS305EP, GS305EPP, GS308EP, GS308EPP

## Technical Specifications

Features	GS305EP	GS305EPP	GS308EP	GS308EPP	GS316EP	GS316EPP
10/100/1000 RJ45 Copper Ports (Auto Uplink)	5	5	8	8	16	16
Enclosure	Metal	Metal	Metal	Metal	Metal	Metal
Connector Type	Metal	Metal	Metal	Metal	Metal	Metal
<b>PoE</b>						
# of PoE ports	4	4	8	8	15	15
# PoE+ 802.3at Ports	4	4	8	8	15	15
SFP ports	0	0	0	0	1	1
Total PoE/PoE+ Budget	63W	120W	62W	123W	180W	231W
Advanced PoE Controls					Yes	Yes
PoE Scheduling	No	No	No	No	Yes	Yes
Uninterrupted PoE	Yes	Yes	Yes	Yes	Yes	Yes
<b>Performance Specification</b>						
Forwarding modes	Store-and-forward					
Bandwidth	10Gbps	10Gbps	16Gbps	16Gbps	28Gbps	28Gbps
Max MAC entries	4K	4K	4K	4K	4K	4K
Buffer Size	192KB	192KB	192KB	192KB	192KB	192KB
Energy Efficient Ethernet (IEEE 802.3az) compliant	Yes	Yes	Yes	Yes	Yes	Yes
Priority queuing	WRR	WRR	WRR	WRR	WRR	WRR
Jumbo frame support	9,216 bytes	9,216 bytes	9,216 bytes	9,216 bytes	10,000 bytes	10,000 bytes
Acoustic noise level @ 25° C (dBA) (ANSI-S10.12)	0	0	0	0	0	0
Mean Time Between Failures (MTBF) @ 25° C	1,164,104 hours	853,770 hours	859,126 hours	842,428 hours	784,742 hours	570,435 hours
<b>L2 Services - VLANs</b>						
VLAN (# Supported)	64	64	64	64	64	64
IEEE 802.1Q VLAN Tagging	Yes	Yes	Yes	Yes	Yes	Yes
Port-based VLANs	Yes	Yes	Yes	Yes	Yes	Yes
<b>L2 Services - Availability</b>						
Link Aggregation/Port Trunking	Yes	Yes	Yes	Yes	Yes	Yes
Number of Static Manual LAGs and # of members	2/4	2/4	2/4	2/4	8/8	8/8
<b>L2 Services - Multicast Filtering</b>						
IGMP snooping (v1, v2, and v3)	Yes	Yes	Yes	Yes	Yes	Yes
Block unknown multicast	Yes	Yes	Yes	Yes	Yes	Yes
Supported Multicast groups	128	128	128	128	128	128
<b>L3 Services - DHCP</b>						
DHCP client	Yes	Yes	Yes	Yes	Yes	Yes

## Technical Specifications

Quality of Service	GS305EP	GS305EPP	GS308EP	GS308EPP	GS316EP	GS316EPP
Rate Limiting	Yes	Yes	Yes	Yes	Yes	Yes
DSCP	Yes	Yes	Yes	Yes	Yes	Yes
IEEE 802.1p COS	Yes	Yes	Yes	Yes	Yes	Yes
Port-based VLAN	Yes	Yes	Yes	Yes	Yes	Yes
TOS	Yes	Yes	Yes	Yes	Yes	Yes
WRR (Weighted Round Robin)	Yes	Yes	Yes	Yes	Yes	Yes
Strict Priority queue technology	No	No	No	No	No	No
<b>IEEE Network Protocols</b>						
<ul style="list-style-type: none"> <li>• IEEE 802.3 Ethernet</li> <li>• IEEE 802.3ab 1000BASE-T</li> <li>• IEEE 802.3u 100BASE-T</li> <li>• IEEE 802.1p Class of Service</li> </ul>	<ul style="list-style-type: none"> <li>• IEEE 802.1Q VLAN Tagging</li> <li>• IEEE 802.3x Full-duplex Flow Control</li> <li>• IEEE 802.3af PoE</li> <li>• IEEE 802.3at PoE+</li> </ul>					
<b>Management</b>						
System Password	Yes	Yes	Yes	Yes	Yes	Yes
Web browserbased management GUI	Yes	Yes	Yes	Yes	Yes	Yes
PC Utility	No	No	No	No	No	No
Port Mirroring	Yes	Yes	Yes	Yes	Yes	Yes
Max number of source ports allowed (one-to-one port mirroring)	1	1	1	1	1	1
Many-to-one Port Mirroring	Yes	Yes	Yes	Yes	Yes	Yes
Cable Test Utility	Yes	Yes	Yes	Yes	Yes	Yes
FW Upgrade Thru Plus Utility (TFTP)	No	No	No	No	No	No
Config download (to Switch) thru Plus Utility	No	No	No	No	No	No
Config upload (to server)	Yes	Yes	Yes	Yes	Yes	Yes
<b>LEDs</b>						
Per port	Speed, Link, Activity, PoE					
Per device	Power, System, PoE Max					
<b>Physical Specifications</b>						
Dimensions (W x D x H)	158 x 101 x 27 mm (6.2 x 4.0 x 1.1 in)	158 x 101 x 27 mm (6.2 x 4.0 x 1.1 in)	158 x 101 x 27 mm (6.2 x 4.0 x 1.1 in)	158 x 101 x 27 mm (6.2 x 4.0 x 1.1 in)	286 x 102 x 27 mm (11.26 x 4.02 x 1.06 in)	286 x 102 x 27 mm (11.26 x 4.02 x 1.06 in)
Weight	0.39 kg (0.86 lb)	0.40 kg (0.88 lb)	0.49 kg (1.08 lb)	0.49 kg (1.08 lb)	0.883 kg (1.95 lb)	0.883 kg (1.95 lb)

## Technical Specifications

### Environmental Specifications

#### Operating

Operating temperature 32° to 104°F (0° to 40°C)

Humidity (relative) 90% maximum relative humidity (RH), non-condensing

Altitude 10,000 ft (3,000 m) maximum

#### Storage

Storage temperature - 4° to 158°F (-20° to 70°C)

Humidity (relative) 95% maximum relative humidity (RH), non-condensing

Altitude 10,000 ft (3,000 m) maximum

### Electromagnetic Emissions and Immunity

#### Certifications

CE mark, commercial  
FCC Part 15 class B  
CE/EN55032/24  
VCCI  
ACMA  
CSA safety  
KC  
BSMI

### Warranty and Support

Hardware Warranty (All Except China/India) 5-year warranty

China/India 1-year warranty

External Power Adapter Warranty 2-year warranty

Technical Support (online, phone) 90 days free of Technical Support with registration

#### ProSUPPORT OnCall 24x7 Service Plans

Category S1:  
PMB0S11-10000S  
PMB0S31-10000S  
PMB0S51-10000S

### Package Contents

#### All Models

NETGEAR Plus Switch  
Power adapter (power cable varies by region)  
Wall installation kit  
Rubber feet  
Installation guide

\*This product comes with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and covers unmodified hardware, fans and internal power supplies –not software or external power supplies, and requires product registration at <https://www.netgear.com/business/registration> within 90 days of purchase; see <https://www.netgear.com/about/warranty> for details. Intended for indoor use only.

†NETGEAR #1 in US Market Share according to NPD data for Unmanaged and Smart Switches, September 2019. NETGEAR #1 in Europe Market Share according to Context data for Unmanaged and Smart Switches, September 2019.

NETGEAR and the NETGEAR Logo are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. ©NETGEAR, Inc. All Rights reserved.